
U



JTJS(4-HSZHXM)-CLCG-2024-005

2024 6 7

[2024] 17

	1400	114	
8555		200	2
1	335	55	
	U		

“ ”

www.creditchina.gov.cn

www.gsxt.gov.cn

3

2024 6 7 2024 6 8

8:30-12:00

14:30-18:00

11 7 0709

—

2024 6 12 11:00()

11 7 0709

—

13209313539

1.

2.

2024 6 12 11:00
_____ 11 7 _____

<http://www.gsj.tj.s.com/>

_____ 11 7 0709 _____

—

730050

13209313539

1225659365@qq.com

U

2024 6 7

1. 2024 6 7 2024 6 8
8: 30-12: 00 14: 30-18: 00

2. 2024 6 12 11

00()

3. 11

7 0709

4. : 2024 6 12 11 00(

) 11 7 0709

5.

6.

13209313539

- 1. _____
- 2. _____
- 3. _____
- 4. _____
- :

1. _____ U _____

2

2.1

2.2

3.

4.

4.1 _____ 15 _____

4.2 _____

4.3

5.

6.

1.

1.1 (): (1)

(2) (3) (4)

(5) (6) 7

2.

2.1

2.2

2.3

2.4

2.5

2.7

"

"

1.

1.1

;

2.

2.1

1.

1.1

2.

(1)

;(2)

;(3)

3.

3.1

3.2

;

3.3

3.4

3.5

4.

4.1

4. 2

4. 3

2024 6 7

_____)
_____ ($\frac{U}{}$
_____)

:

1.

2.

)

(

3.

4.

5.


(): _____

_____ (

)

_____ (


(): _____

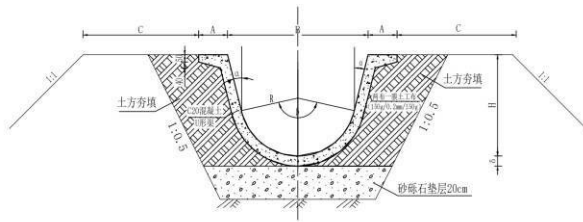


U形渠道断面图

预制混凝土U形渠道断面尺寸表

渠道 规格	断面尺寸						
	R	α	β	h	A	B	H
U60	300	14°	155°	70	200	650	800
U40	250	14°	155°	70	200	550	700



伸缩缝详图
1:10

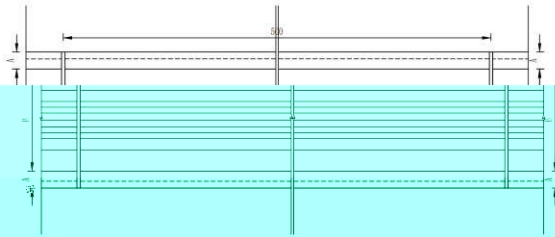

U形渠道平面设计图

1:25

说明:

- 1、图中尺寸单位为mm。
- 2、预制混凝土强度等级为C20。
- 3、每5m设置一道伸缩缝，缝宽2cm，上部采用聚乙烯橡胶泥灌缝，下部采用聚乙烯闭孔泡沫板。
- 4、渠道单节长度0.5m。
- 5、土方旁填压实度不小于0.95。